t3 MonoFit®


Guide for a successful installation

Before you install your new T3 MonoFit® integrated tap, there are a few things to bear in mind for a successful installation.

Consider water, waste, power and space.

Full installation instructions and cutting templates are provided in the product manual.

Capacity	Chilled 50 L/hr 80 L/hr Hot 16 L/hr
Temperature	Chilled 2°C Hot 96°C
Dispense height	310mm
Power	230-240V
Dimensions	Tap W160 x D324 x H338mm Undercounter W320 x D471 x H400mm
System	ProCore® DryChill®
Technology	EcoMode DeepSparkle® (select models only)
Hygiene	Totality®

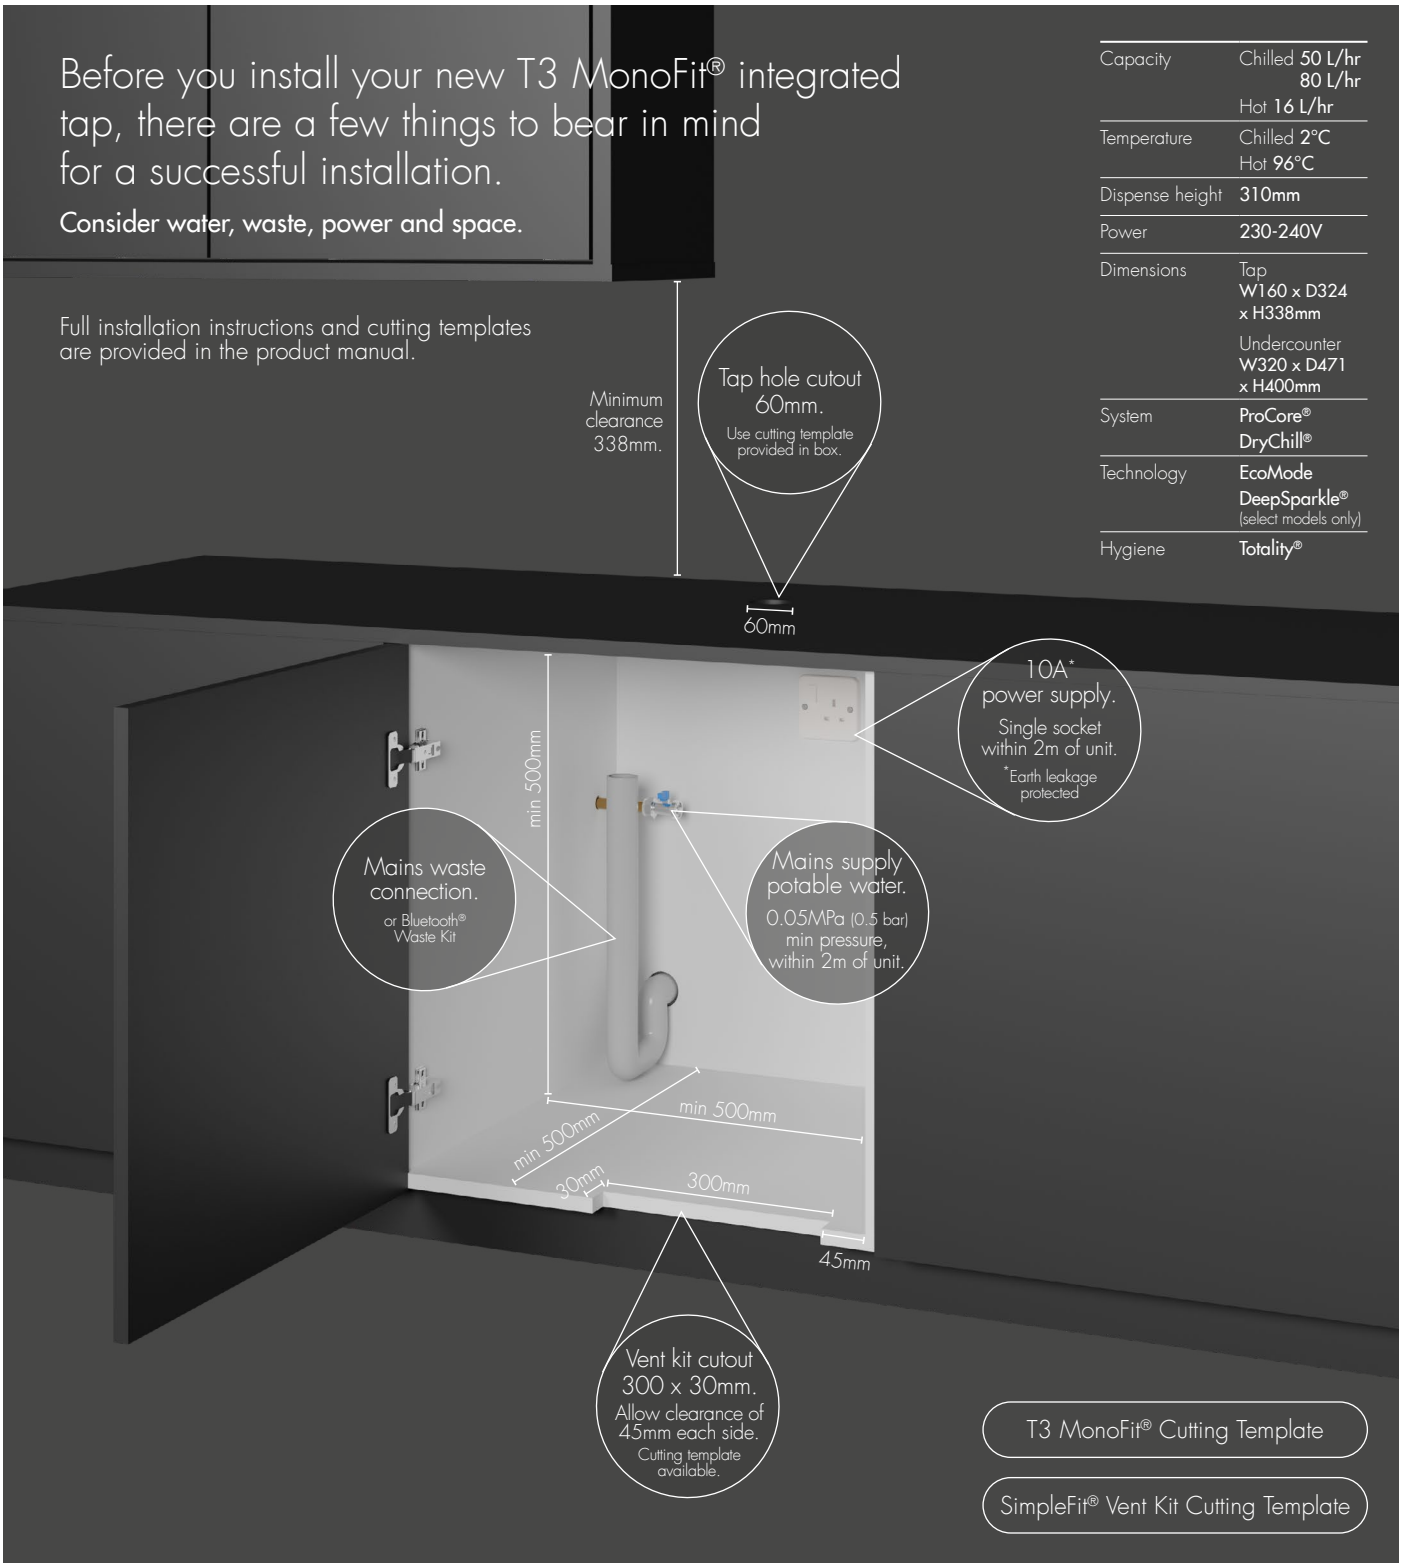

T3 MonoFit® Cutting Template

SimpleFit® Vent Kit Cutting Template

borg& overström

For support please contact


+44 (0)1362 695 006

support@borgandoverstrom.com

VIEW T3 MANUAL

t3 MonoFit®

Guide for a successful installation

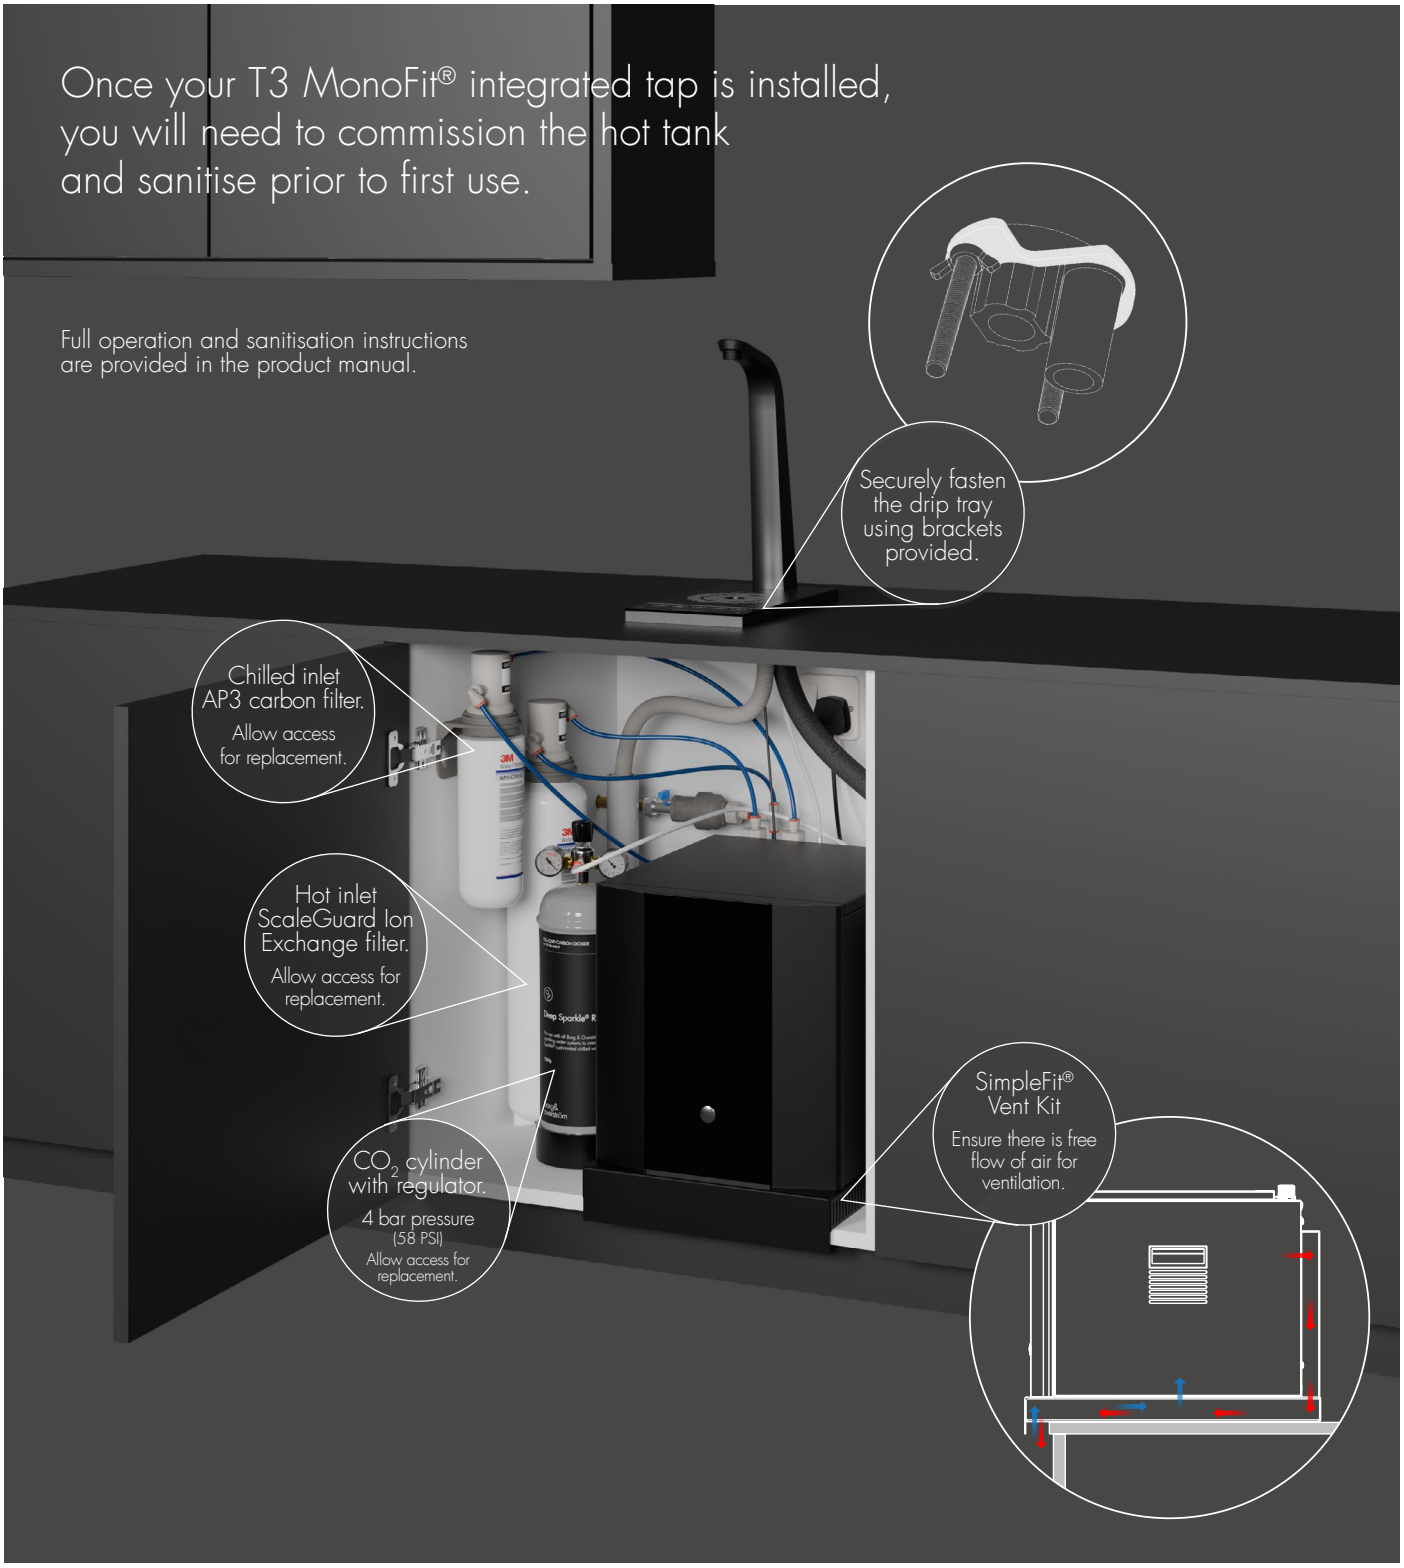

borg& overström

For support please contact

+44 (0)1362 695 006

support@borgandoverstrom.com

VIEW T3 MANUAL